

Description

- MCT8MF filters designs specially for the CE102 conduction launch request in the military equipment through electromagnetic compatibility military symbol GJB 151A/152A.
- Excellent interference suppression performance for CM and DM
- High quality components,high performance/cost
- Excellent performance at high and low frequency.
- Welcome for customized products.










Typical Applications :

- Each kind of military electronic installation.

Specification :

Type:	Single phase
Rated Voltage:	250VAC
Operating frequency:	50/60Hz
Rated Current:	1A~10A
Temperature range :	HPF 25/085/21
Test voltage(1min):	
Line to ground :	1500VAC
Line to Line :	1500VDC

Data table:

MCT P/N:	Rated Current: A	Rated Voltage: V	Leakage Current: mA max	Input/Output connections	Dimension
MCT8MF-1-3	1	250	0.5		70
MCT8MF-3-3	3	250	0.5		70
MCT8MF1-1-3	1	250	1.0		71
MCT8MF1-3-3	3	250	1.0		71
MCT8MF2-3-1	3	250	0.5		72
MCT8MF3-6-1	6	250	0.5		73
MCT8MF3-10-6	10	250	1.0		73
MCT8MF4-6-6	6	250	1.0		74
MCT8MF4-10-6	10	250	1.0		74

Dimension: unit :mm

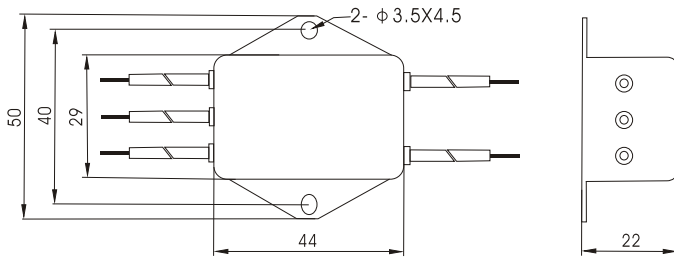


Fig 70

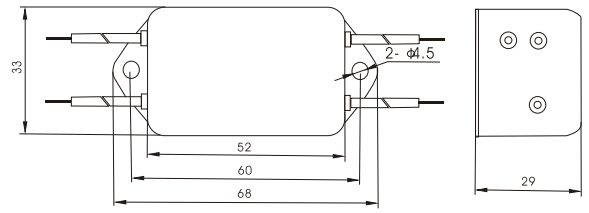


Fig 71

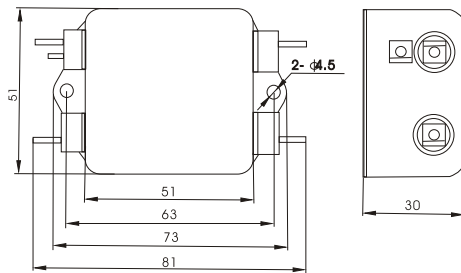


Fig 72

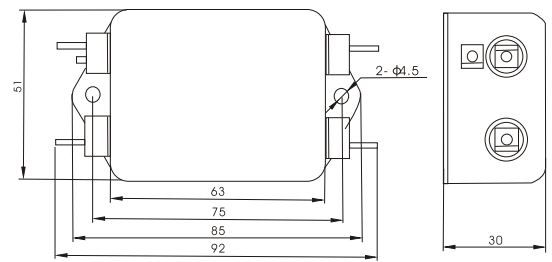


Fig 73

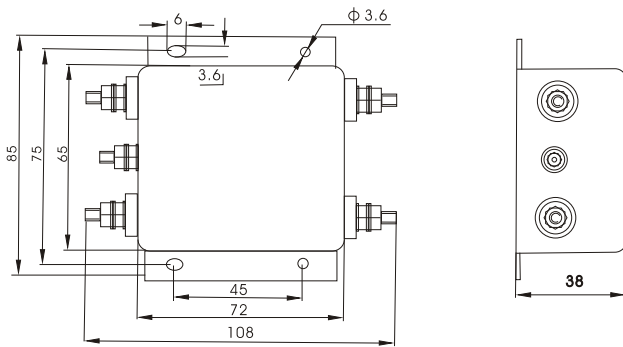


Fig 74